



Walnut

Pine

Maple

Ash

Teak

Bamboo

Elim

Oak





UNIDECO LOOSE LAY

LAYER COMPOSITION

- UV Coating Layer
- Clear Wear Layer
- Printed Sheet
- Middle Layer 1
- G/F Layer
- Middle Layer 2
- Balance Layer
- Non-slip Layer

ISO 9001:2015 ISO 14001:2015 ISO 45001:2018

PRODUCT SPECIFICATIONS

Thickness	Wear layer (mm)	Width & Length (mm)	per BOX
5 mm	0.5	177.8 x 1,219.2	10pcs (2.167sqm)
	0.7	470 x 470	10pcs (2.209sqm)

Environment-Friendly Luxury Vinyl Tiles

Experience beautiful UNIDECO Loose Lay Tile with convenience of installation. Fully Recyclable Loose Lay Tile shows UNIDECO's value which cares about the environment.

CHARACTERISTICS

- With glass fiber layer.
- Easy installation.
- With anti slip backing.
- Supreme durability.
- Environment-friendly vinyl floor tile. (No need of adhesives)
- Fully recyclable.

UNIDECO ACOUSTIC

LAYER COMPOSITION

- UV Coating Layer
- Clear Wear Layer
- Printed Sheet
- Middle Layer 1
- G/F Layer
- Middle Layer 2
- Balance Layer
- Noise Absorption Layer
- Non-slip Layer

ISO 9001:2015 ISO 14001:2015 ISO 45001:2018

PRODUCT SPECIFICATIONS

Thickness	Wear layer (mm)	Width & Length (mm)	per BOX
5 mm	0.5	177.8 x 1,219.2	10pcs (2.167sqm)
	0.7	470 x 470	10pcs (2.209sqm)

Bring your living space more peaceful and quiet with UNIDECO "ACOUSTIC"

Style your home with natural elegance of wood-look & specialized technology, "Acoustic". Sounds can be stressful in our environment, so UNIDECO Acoustic is the key when it comes to reducing the noise between the stories in any residential places.

CHARACTERISTICS

- Excellent dimensional stability by applying glass fiber layer.
- Cost effective(no glue down).
- Excellent noise reduction & absorption.
- Fully recyclable.
- Environment-Friendly vinyl floor tiles.
- Soft feeling underfoot.

UNIDECO CLICK 5G 2G

LAYER COMPOSITION

- UV coating layer
- Clear Wear Layer
- Printed Sheet
- G/F
- Click Profile
- Middle Layer
- Balance Layer

UNIDECO UNICORE

WPC/ SPC rigid core without containing wooden material

- Most rigid & durable
- Water-proof
- PVC foam-backing(optional)

Thickness	Width & Length
5.5mm	177.8 x 1,219.2mm
8.8mm	

Rigid core (foamed / non-foamed)

ISO 9001:2015 ISO 14001:2015 ISO 45001:2018

PRODUCT SPECIFICATIONS

Thickness	Wear layer (mm)	Width & Length (mm)	per BOX
4.3mm	0.3	Ø176 x 940	⓪12pcs (1.98sqm) ⓪10pcs (2.04sqm)
5 mm			⓪10pcs (1.65sqm) ⓪10pcs (2.04sqm)
6 mm	0.7	Ø169 x 1,210	⓪9 pcs (1.49sqm) ⓪9 pcs (1.84sqm)

Unideco Click System

Style your home with natural elegance of wood using uniquely designed UNIDECO Click edge profile to give enduring, flawless finish every time. There is no need of adhesive, tools or professional installation. It couldn't be simpler.

HUMAN & NATURE

Unideco always studies and thinks about happy space. Unideco creates beautiful future space.

Product Features

- Creates special space with differentiated design and pattern
- Providing high stability and comfortable walking
- Strong at dent and scratch
- Easy cleaning and maintenance with special surface treatment
- Maintaining eco friendly space with no harmful chemicals

UNIDECO WEAR LAYER

Wear layer over 0.3mm is recommended for the environment with shoes on.

- Wear layer 0.1mm**
Residential use
House
- Wear layer 0.3mm**
Public and commercial use
Restaurant, Office, Cafe, etc
- Wear layer 0.5mm**
Public and commercial use
Department store, Bank, Hospital, Hotel, Mart, Theater, etc
- Wear layer 0.7mm**
Light industrial use
Factory



KW 7801

NEW



KW 5442

IMAGE NEW



KW 7805

IMAGE NEW



KW 5445

IMAGE NEW



KW 7806

NEW



KW 5446

IMAGE NEW



KW 5104



KW 5106



KW 5442, KW 5445, KW 5446



KW 7805

* These small sample-chips may be different from real products in colors and feelings



KW 7336

IMAGE NEW



KW 7337

NEW



KW 6002



KW 6003



KW 7338

IMAGE NEW



KW 6001



KW 6551



KW 6022



KW 7336

* These small sample-chips may be different from real products in colors and feelings



KW 5027



KW 6023



KW 7338

* These small sample-chips may be different from real products in colors and feelings



KW 6011



KW 5015



KW 7711

NEW



KW 7602

NEW



KW 6012



KW 5016



KW 7712

NEW



KW 7603

IMAGE NEW



KW 6013



KW 5018



KW 7713

NEW



KW 7605

NEW



KW 5411



KW 5123



KW 5011



KW 5012



KW 5412



KW 5013



KW 5121



KW 7603

*These small sample-chips may be different from real products in colors and feelings

Antique Wood

Dimension 3.0(T) x 184(W)mm x 950(L)mm Packing 19pcs / 3.32M²
Dimension 3.0(T) x 177.8(W)mm x 1219.2(L)mm Packing 15pcs / 3.25M²



KW 7501

IMAGE NEW



KW 7503

IMAGE NEW



KW 7502

NEW



KW 6045



KW 6071



KW 6047



KW 6072



KW 7501

* These small sample-chips may be different from real products in colors and feelings



KW 7503

* These small sample-chips may be different from real products in colors and feelings

Antique Wood

Dimension 3.0(T) x 184(W)mm x 950(L)mm Packing 19pcs / 3.32M²
Dimension 3.0(T) x 177.8(W)mm x 1219.2(L)mm Packing 15pcs / 3.25M²



KW7311

IMAGE NEW



KW7312

IMAGE NEW



KW7313

NEW




KW7321

NEW



KW7311

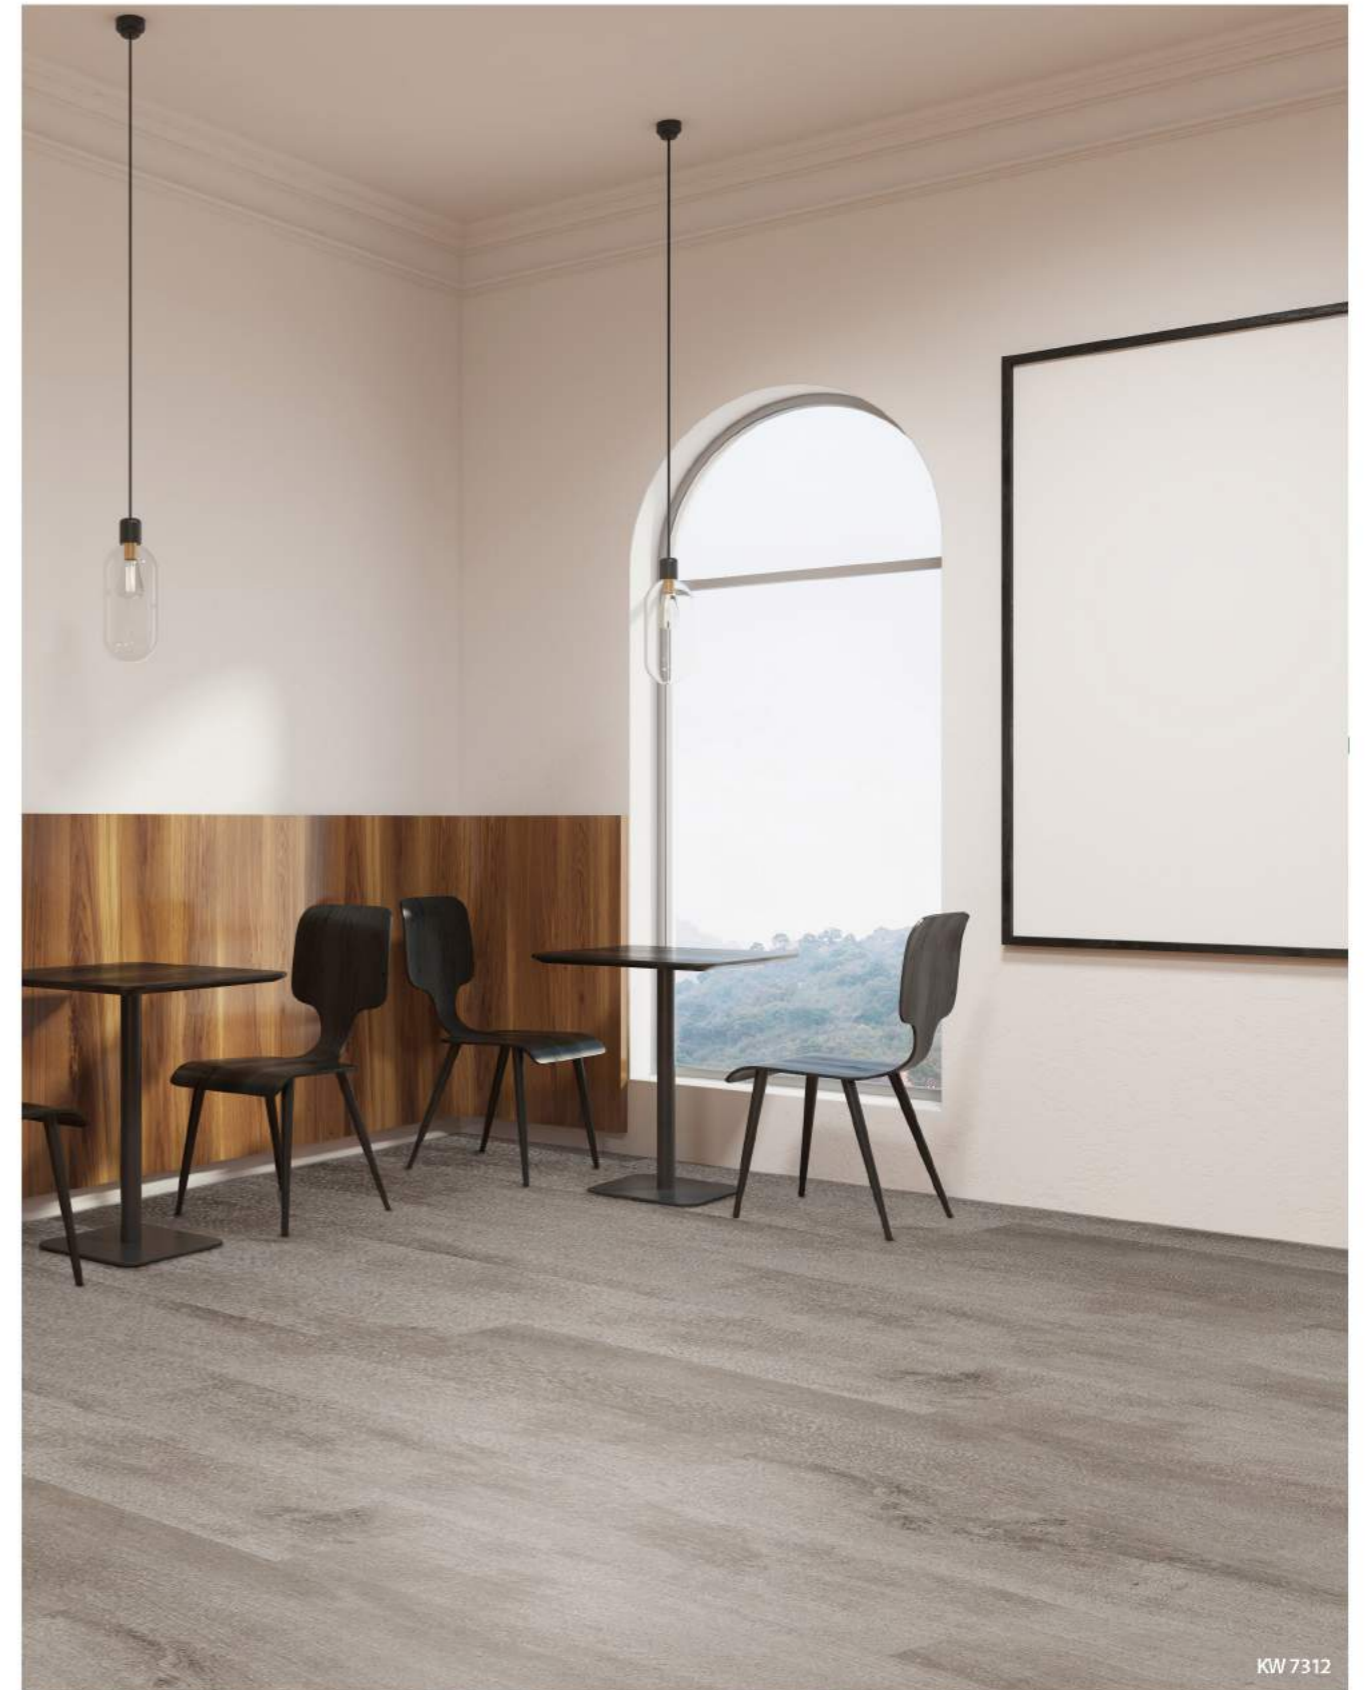

KW7312

* These small sample-chips may be different from real products in colors and feelings

Antique Wood

Dimension 3.0(T) x 184(W)mm x 950(L)mm Packing 19pcs / 3.32M²
Dimension 3.0(T) x 177.8(W)mm x 1219.2(L)mm Packing 15pcs / 3.25M²



KW7322

NEW



KW7323

IMAGE NEW



KW6311



KW6315



KW7323

*These small sample-chips may be different from real products in colors and feelings



KW 6061



KW 6062



KW 6063



KW 7301

NEW



KW 6031



KW 7303

IMAGE NEW



KW 6032



KW 6033



KW 7303

* These small sample-chips may be different from real products in colors and feelings



KW 7304

IMAGE NEW



KW 6733



VG 02



KW 5321

KW 7304

* These small sample-chips may be different from real products in colors and feelings

Antique Wood

Dimension 3.0(T) x 184(W)mm x 950(L)mm Packing 19pcs / 3.32M²
Dimension 3.0(T) x 177.8(W)mm x 1219.2(L)mm Packing 15pcs / 3.25M²



KW 7701

IMAGE NEW



KW 7613

NEW



KW 7702

IMAGE NEW



KW 7614

IMAGE NEW



KW 7704

NEW



KW 7616

NEW



KW 7701



KW 7614

* These small sample-chips may be different from real products in colors and feelings



KW 7702

* These small sample-chips may be different from real products in colors and feelings

Carpet / Fabric Tiles

Dimension 3.0(T) x 470(W)mm x 470(L)mm Packing 15pcs / 3.31M²



* These small sample-chips may be different from real products in colors and feelings

Stone / Concrete Tiles

Dimension 3.0(T) x 470(W)mm x 470(L)mm Packing 15pcs / 3.31M²



* These small sample-chips may be different from real products in colors and feelings



KT 2711 NEW KT 2713 IMAGE NEW KT 2721 IMAGE NEW KT 2722 NEW




KCT 2221

* These small sample-chips may be different from real products in colors and feelings



KCM 1611 KCM 1613 KCM 1712 KCM 1713

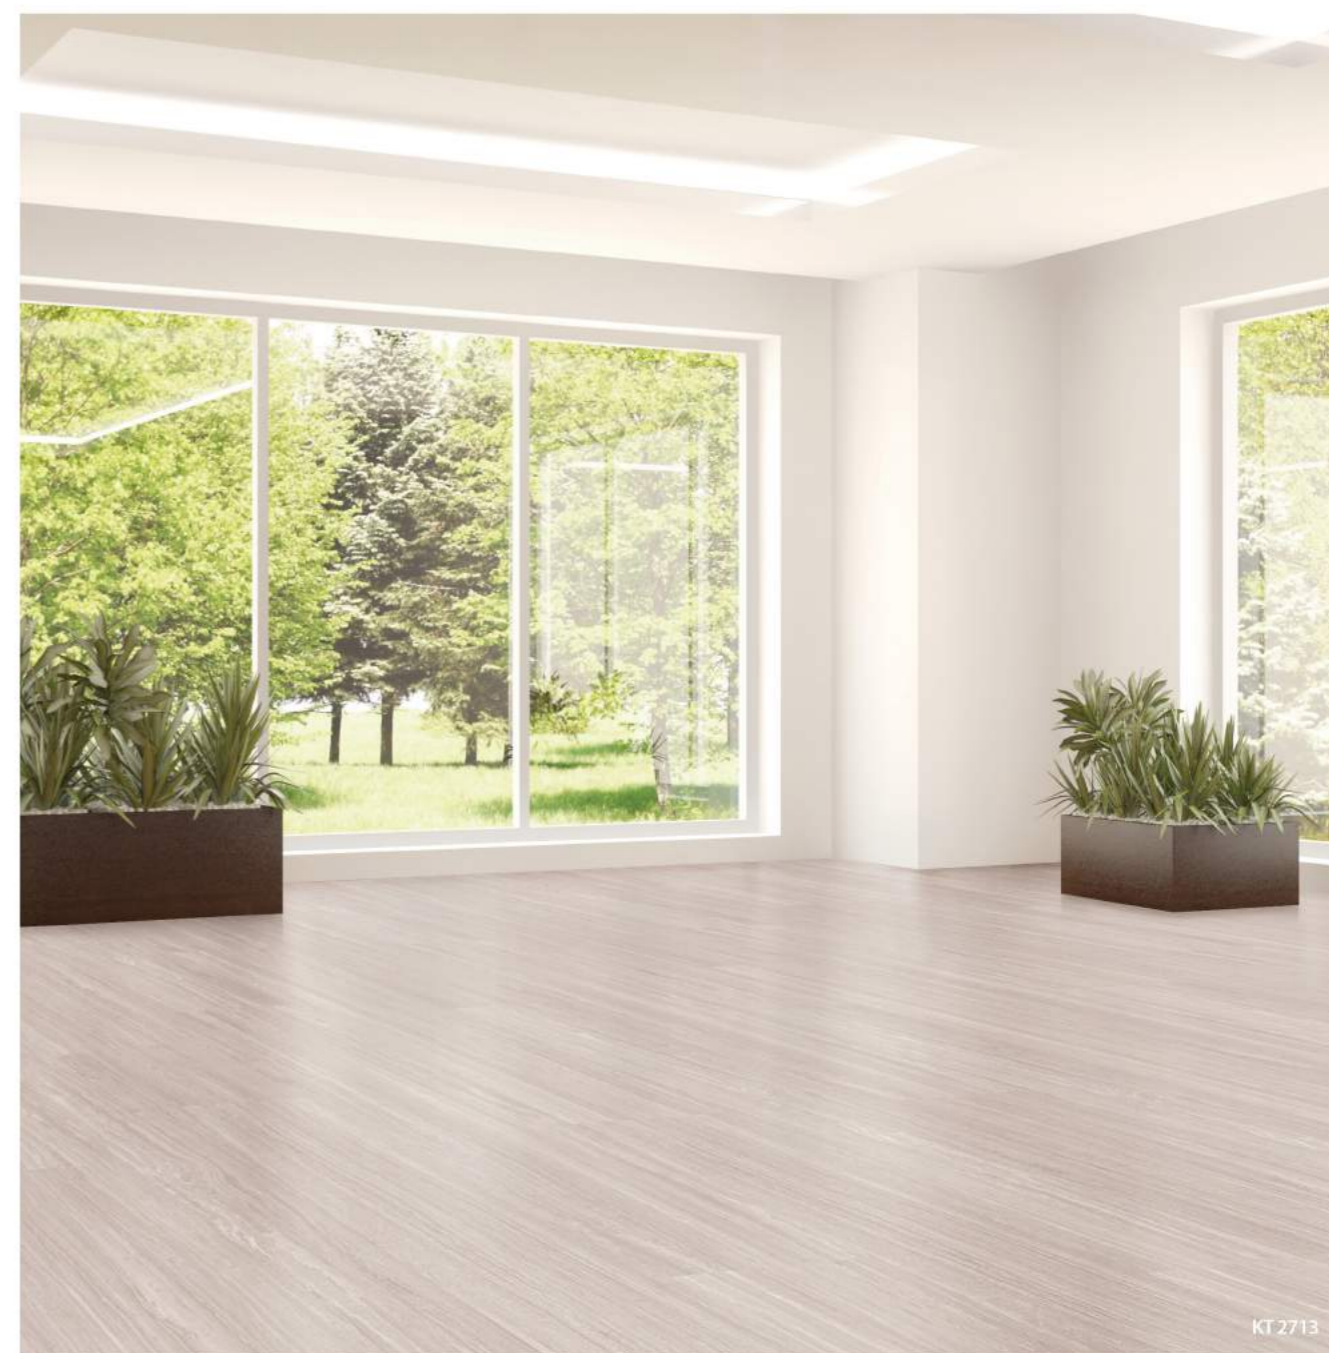

KT 2713

* These small sample-chips may be different from real products in colors and feelings

Stone / Concrete Tiles

Dimension 3.0(T) x 470(W)mm x 470(L)mm Packing 15pcs / 3.31M²




KT 2721

* These small sample-chips may be different from real products in colors and feelings

Mable/Abstract Tiles

Dimension 3.0(T) x 470(W)mm x 470(L)mm Packing 15pcs / 3.31M²

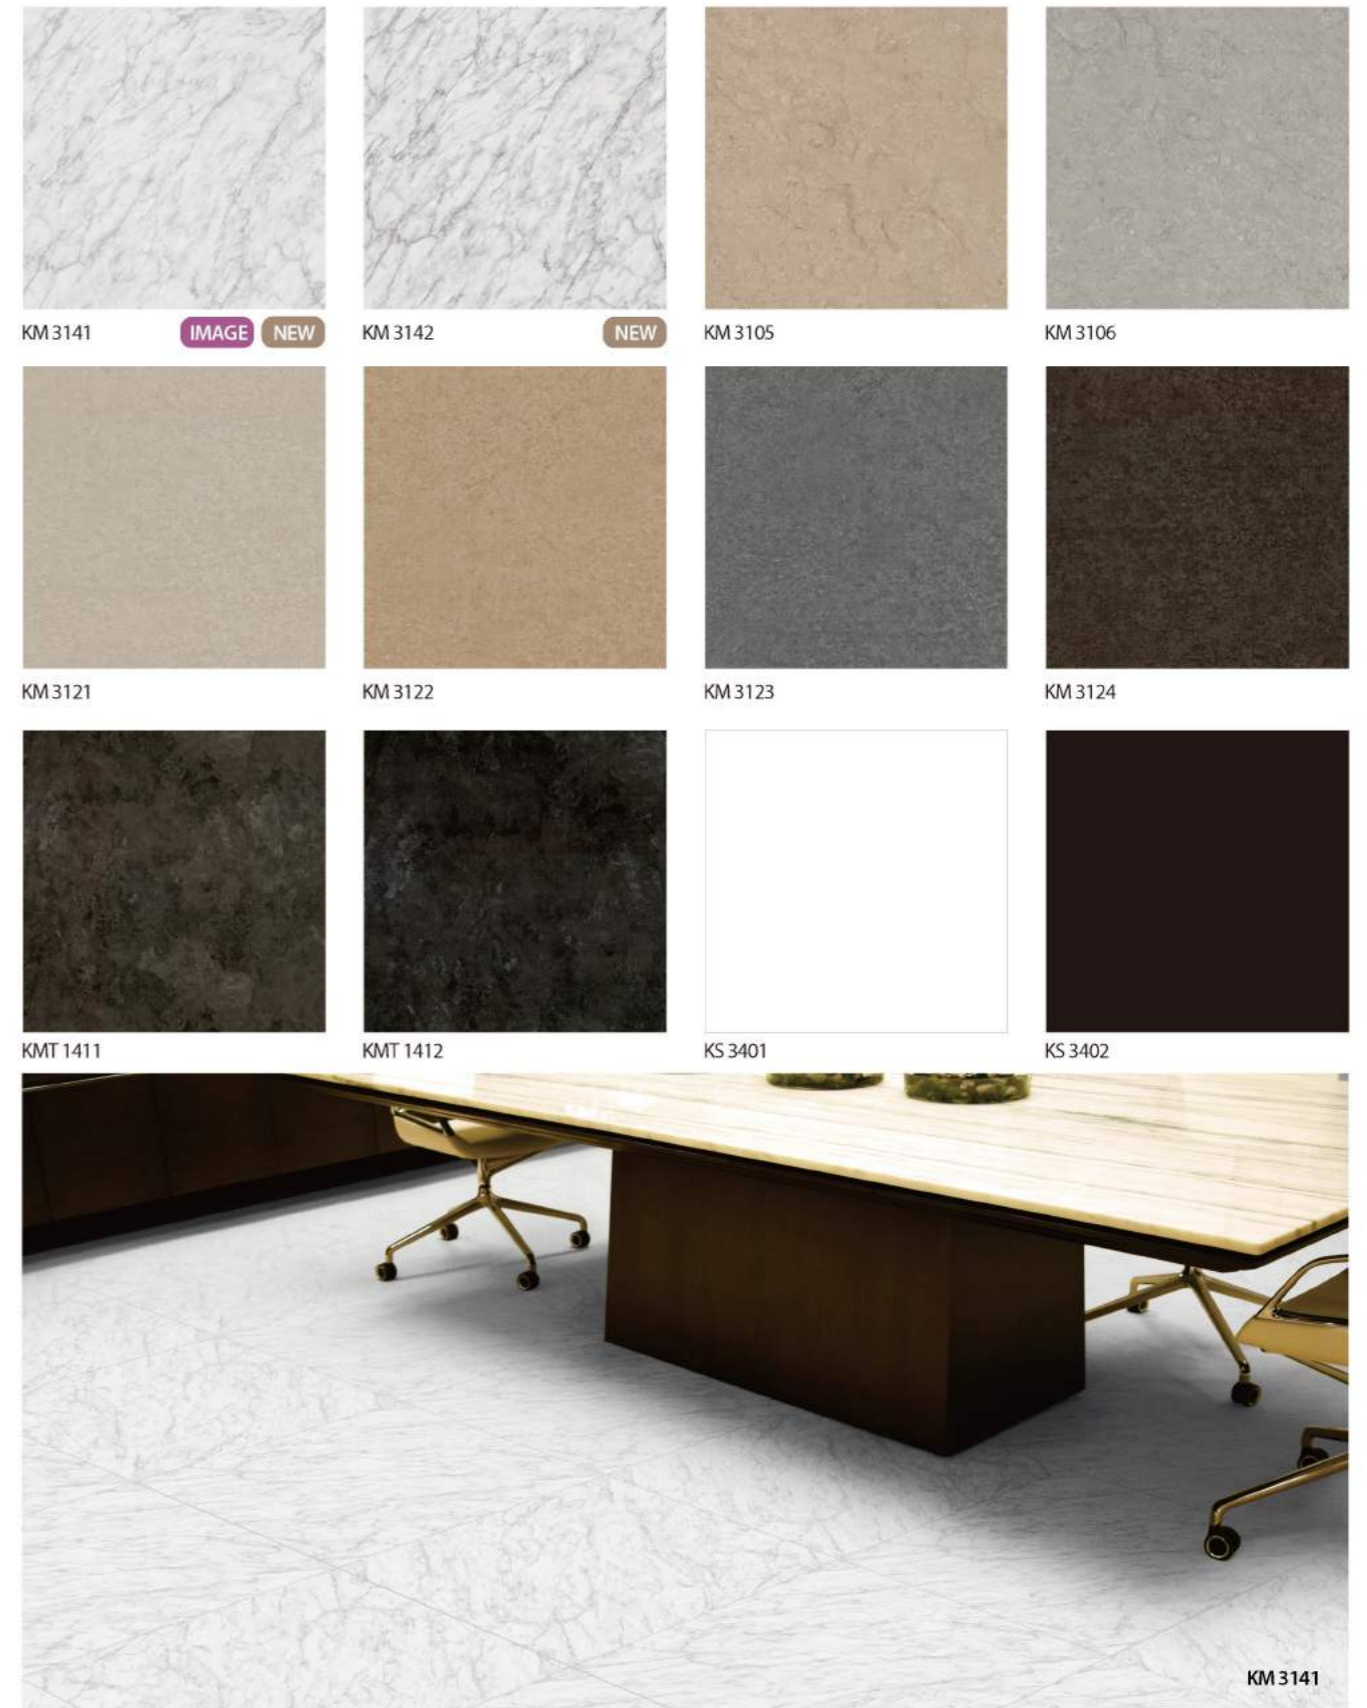

KM 3141


* These small sample-chips may be different from real products in colors and feelings




M01




M02

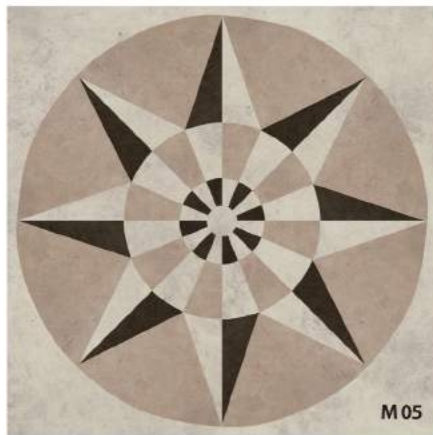

M05

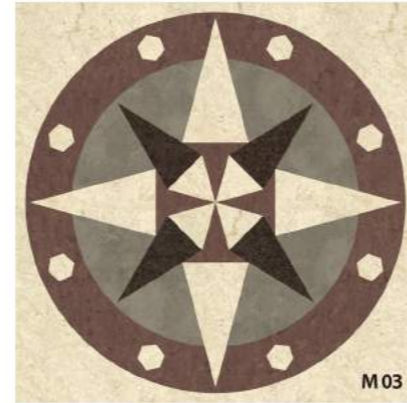

M03

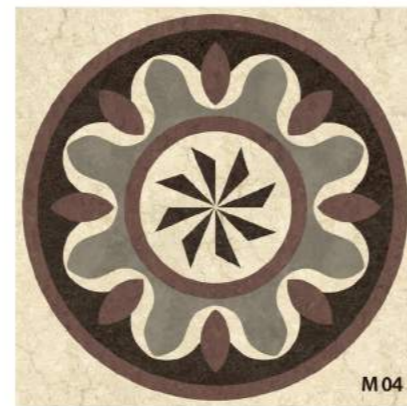

M04



M07



M10

Preparation

1. The surface of floor must be completely dry. Please note that even though the floor may appear dry, it may still retain moisture. Moisture testing is a mandatory step in subfloor preparations.
2. In newly constructed buildings, it is necessary to dry the flooring surface for 7 to 14 days prior to application to ensure that no moisture is retained in cement surfaces.
3. Any polish, paint, dirt, etc. must be completely removed from the floor before installation. Dry mop and sweep the entire floor to remove surface sand, soil, and debris.
4. Ensure that floor surface is flat and level. Use a scraper to flatten the floor surface or a putty knife to remove gum and/or labels.
5. Maintain room temperature above 15°C (59°F) before installation. Adhesive and flooring products must be kept in the same environment for at least 24 hours before installation begins.
6. Use only UNIDECO recommended adhesives

Installation

1. Prepare all rulers, cutters, adhesives, spreaders, and compass dividers before commencing work.
2. Check that all application products are of the same batch/lot number.
3. Find the exact center of floor by marking vertical and horizontal lines across the floor.
4. Measure the squareness of the marked lines, and then start applying adhesives on the first quarter of the marked floor space.
5. Work on small portions of the floor at a time, and apply adhesives accordingly. Optimum usage of adhesive is 0.3 to 0.45kg per square meter.
6. Approximate 20 to 30 minutes after applying adhesive, lay the flooring products.
7. Keep distance of around 5mm from the wall and the edge of the flooring products. Press products down firmly so that the product lies flat on the ground.
8. As adhesive is flammable, avoid any contact with sparks or open flames.
9. As adhesive dried up quickly, remove excess adhesive immediately by using alcohol or alkali water.

Maintenance

1. In order to allow the flooring adhesives time to cure, restrict traffic and do not move furniture onto a newly installed floor for at least 24 hours after installation. Additionally, allow at least 3 days after installation before washing a newly tiled floor.
2. Be careful not to put any dents or marks on the floor when moving heavy furniture.
3. Furniture polish and/or rubber supports may leave stains on the floor surface over a long period of time. Check the bottom of furniture to ensure it is clean before moving it on to the new floor.
4. The application of surface dressing is a function of the floor usage. Under high traffic conditions, the dressing should be stripped and reapplied every one or two months. However, under general household conditions, this may only need to be done once every six months.
5. When removing stains and polish, do not use strong solvents or household cleaning fluids. Instead, use widely known alkali water based floor polish removers and cleaner.

* These small sample-chips may be different from real products in colors and feelings



High quality interior finish New Collection

UNIDECO is dedicated to making balance & harmony between human and space, considering its function & quality.

- Carpet
- Stone
- Marble
- Fabric
- Abstract